FORETEC
ACCESS SEE CONTROL

DACON Inspection Technology

Visioprobe range accessories

- Centering devices (custom sizes possible)
- Telescopic poles
- Reels (flexible cable or push rod)
- Compact cases or wheeled suitcase with telescopic handle

VISIOPROBE

Control unit

Compact cameras

Mobility tools

FORETEC
ACCESS SEE CONTROL

CENTERING DEVICES FOR Ø 45 MM VISIOPROBE CAMERA

- Centering devices: Single, double, on wheels and/or for telescopic poles
- Compact, ergonomic, ultra-light weight
- Custom sizes possible

ON DEMAND DIMENSIONS

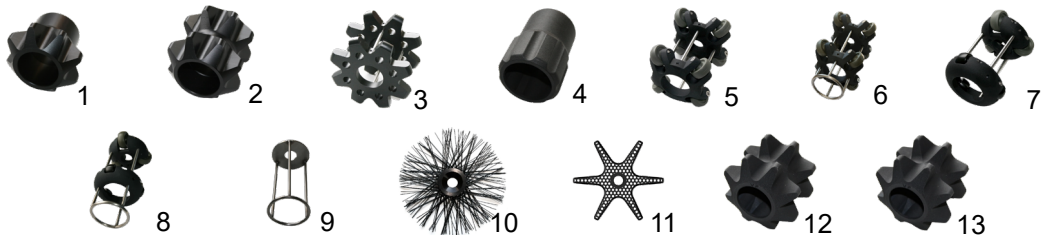

	Reference	Usage	Material	Standard outside Ø*	Weight	System of fixing	Facilitates sliding	Good resistance to abrasion	Chemical resistance	Camera head protection	Very good vertical centering
1	VPCEN45	with push rod	POM-C	89 mm	154 g	screwing from the back of the camera	X	X	++		
2	VPCEN45DOUBLE		POM-C	89 mm	234 g		X	X	++		
3	VPCEN45DOUBLE-150		POM-C + Stainless steel	150 mm	525 g		X	X	++		
4	VPCEN45SP		PA12	*	66 g		X	X	+		
5	VPCEN45DOUBLE-125R		PA12 + Stainless steel	125 mm*	312 g		X	X	+		
6	VPCEN45DOUBLE-125R-A		PA12 + Stainless steel		350 g		X	X	+	X	
7	VPCEN45DOUBLE-90R		PA12 + Stainless steel	90 mm*	214 g		X	X	+		
8	VPCEN45DOUBLE-90R-A		PA12 + Stainless steel	90 mm*	252 g		X	X	+	X	
9	VPCEN45METAL	with flexible cable	Stainless steel	90 mm*	126 g	from the back of the camera		X	+	X	
10	VPCEN45H		Nylon + aluminium	160/200/250/300 mm	126 g	screwing from the back of the camera				X	X
11	VPCEN45P	with carbon pole	PA12	200 mm*	163 g	screwing from the back of the camera on the pole	X	X	+		
12	VPCEN45P-DOUBLE105		PA12	104 mm*	151 g		X	X	+		
13	VPCEN45P-DOUBLE90		PA12	89 mm*	127 g		X	X	+		

* Other dimensions on request

CENTERING DEVICES FOR Ø 28 MM VISIOPROBE CAMERA

ON DEMAND DIMENSIONS

Reference	Usage	Material	stand. outside Ø	Weight	System of fixing	Features
VPCENF28	with push rod	PA12	39,2 mm*		Clamping from the back of the camera	• Facilitates sliding • Good resistance to abrasion • Medium chemical resistance

* Other dimensions on request

CENTERING DEVICES FOR Ø 25 MM VISIOPROBE CAMERA

ON DEMAND DIMENSIONS

Reference	Usage	Material	stand. outside Ø	Weight	System of fixing	Features
VPCENF25	with push rod	POM-C	39,8 mm	27 g	Clamping from the back of the camera	• Facilitates sliding • Good resistance to abrasion • Medium chemical resistance

FORETEC
ACCESS SEE CONTROL

CARBON TELESCOPIC POLES

- 6 very rigid and light carbon tubes
- Mounting of rotating cameras on threaded ring
- Video cable integrated in the tube of the pole
- Threaded mounting piece for motorized or axial camera

Reference	N° of items	Max length	Collapsed length	Overall Ø	Weight (without cable)	Stock available
VPPERCARBON-56	6	5,6 m	1,1 m	38,5 mm	680 g	√
VPPERCARBON-39		3,9 m	0,8 m		530 g	
VPPERCARBON-27		2,7 m	0,6 m		420 g	√
VPPERCARBON-21		2,1 m	0,5 m		370 g	
VPPERCARBON-15		1,5 m	0,4 m		320 g	
VPPERCARBON-04	2	0,4 m	0,2 m	28,2 mm	100 g	

REELS

- Electronic metric counter
- Dimensions: 490 * 214 * 530 mm

Reference	Ø	Push rod length	Bending radius	Stop system	Control unit mounting brackets n°	Weight
VPDEV30	8 mm	30 m	170 mm	Braking ring	1	9,6 kg
VPDEV50S	for flexible cable	≤50 m*	-	Retaining stop Winding crank		6,1 kg (without cable)

* Length to be confirmed - cable not included

COMPACT CASES AND SUITCASES

Reference	Type	Dimensions	Material	Weight
VPVAL	Standard case for transporting control unit, cameras, cable and accessories (except reels and poles)	520 * 435 * 230 mm	Unbreakable polypropylene copolymer	5,65 kg
VPVALM	Rifle case for transporting control unit, cameras, cable and telescopic pole VPPERCARBONE27	989 * 415 * 157 mm		7,1 kg
VPVALF	Rifle case for transporting control unit, cameras, cable and telescopic pole VPPERCARBONE56	1189 * 415 * 189 mm		7,8 kg
VPSACADOS	Compact rugged backpack for carrying control unit, cameras, cables and accessories (except reels and poles)	460 * 330 * 260 mm	Shock resistant with special coating to prevent any risk of moisture	1,29 kg

DACON Inspection Technology
+31(0)71 - 747 0110
www.daconbv.nl
info@daconbv.nl
YOUR RELIABLE ADVISER AND PARTNER FOR VISUAL INSPECTION EQUIPMENT